

REC'D 17 NOV 2004

WIPO

PCT

PCT/1804/52431

PA 1127694

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

February 12, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/520,578

FILING DATE: November 17, 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

E. BORNETT
Certifying Officer

Please type a plus sign (+) inside this box → +

PTO/SB/16 (02-01)
Approved for use through 10/31/2002. OMB 0851-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (c).

Express Mail Label No. EV 312 069 560

DATE OF DEPOSIT: 17 NOVEMBER 2003

INVENTOR(S)

Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
XIANG-NING PAUL ANTOINE OLIVIER	LI DETMER COLLET-BILLON GERARD	MILL CREEK, WA, US SEATTLE, WA, US PARIS, FRANCE VIROFLAY, FRANCE

TITLE OF THE INVENTION (280 characters max)

METHOD FOR UTILIZING USER INPUT FOR FEATURE DETECTION IN DIAGNOSTIC IMAGING

CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

Place Customer Number
Bar Code Label here

OR

Type Customer Number here

<input type="checkbox"/> Firm or Individual Name	PHILIPS ELECTRONICS NORTH AMERICA CORPORATION				
Address	P.O. BOX 3001				
Address					
City	BRIARCLIFF MANOR	State	NY	ZIP	10510-8001
Country	USA	Telephone	914-333-9627	Fax	914-332-0615

ENCLOSED APPLICATION PARTS (check all that apply)

<input checked="" type="checkbox"/> Specification Number of Pages	9	<input type="checkbox"/> CD(s), Number	
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets	2	<input type="checkbox"/> Other (specify)	
<input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76			

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

- ☐ Applicant claims small entity status. See 37 CFR 1.27.
☐ A check or money order is enclosed to cover the filing fees
☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number: 14-1270
☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE
AMOUNT (\$)

160

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

- ☒ No.
☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,
SIGNATURE

Date 17 NOVEMBER 2003

TYPED or PRINTED NAME JOHN VODOPIA

REGISTRATION NO. 36,299
(if appropriate)

Docket Number: US030453

TELEPHONE 914 333-9627

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Commissioner for Patents, Alexandria, VA 22313-1450.

METHOD FOR UTILIZING USER INPUT FOR FEATURE DETECTION IN DIAGNOSTIC IMAGING

The present invention relates to ultrasound diagnostic imaging. Specifically, the present invention relates to a method for utilizing user input for feature detection in
5 diagnostic imaging.

Ultrasound has become an important tool in medical diagnostics. Ultrasound's non-invasive and generally benign radiation-free imaging has found wide spread use, especially in fetal imaging and extended exposure video imaging. While ultrasound has good penetration through the soft tissues of the human body, there is no way to prevent
10 reflection of overlaying structures from obscuring the areas of interest during the imaging process. This becomes particularly important for 3D or Live 3D ultrasound imaging where the relationship of the overlying structures may have a complex relationship with the viewing planes or volume being observed

Attempts have been made to provide a way to remove obscuring or distracting
15 regions from ultrasound images and volumes. One such method requires the operator to manually select and remove the obscuring region within an ultrasound imaging application. While this method provides adequate accuracy, it is a very time consuming process and thus not appropriate for real-time ultrasound imaging applications.

A second method provides an automatic selection process wherein the operator
20 initially identifies the region of interest, perhaps by selecting from a menu of choices or manually selecting the region, and from that point on the ultrasound imaging software automatically detects and removes or de-emphasizes the obscuring portions of the ultrasound image. This method can be significantly faster and therefore has the potential of being very useful in real-time applications. However, this method too has its drawbacks.
25 While corporeal structures have the same basic shape from one person to another, size may differ, disease may alter the shape of the structure, and even the particular position of the ultrasound transducer during imaging may cause the structure to appear altered from its typically accepted shape. These variations in shape can lead to misidentification of regions by the automatic selection process. This possibility for misidentification also contributes to
30 an operator's reluctance to rely on the automatic selection process, defeating the purpose of supplying such a process in the ultrasound imaging software.

What is needed is a selection process that is both accurate enough to inspire trust from the operator and fast enough to be applicable in real-time imaging applications. An object of the present invention is to provide a method that, with limited input from the operator, is able to identify regions of interest in an ultrasound image or volume, both still
5 and live, and remove or de-emphasize obstructions thereon.

The present invention provides a method for utilizing user input for segmentation and feature detection in diagnostic imaging. By using the detection methodology of the present invention, structures can be identified and either emphasized or de-emphasized based on their position within an operator-specified region of interest.

10 The method of the present invention for defining internal structural borders in a medical ultrasonic image includes several steps. Initially, an ultrasonic image or volume region having a region of interest is acquired. A feature of interest is located in the ultrasonic image or a plane of the volume and at least one side of the shape is placed in a proximal relationship to the feature. At least one starting point within at least one shape is
15 identified. The starting point is used for detecting and delineating a tissue border within the ultrasonic image or tissue surface within the volume. The tissue border detection is performed using internally stored complex shapes having fuzzy border regions instead of solid linear borders. As more points are located, the border regions may be adjusted to produce a best-fit based on the currently located points. An indicator is provided for
20 identifying and highlighting the tissue border on the ultrasound image to the operator. The indicator may include emphasizing the tissue structure by colorizing or enhancing the contrast of the region bounded by the detected tissue structure.

Additionally, the present invention may allow the operator to interactively modify the shape placed in proximal relationship to a feature. The operator modifies the shape so
25 that it more close matches or approximates the region of interest, i.e. if the region of interest is generally oval or ellipsoidal in shape, then the operator may select a circular shape, place the shape over the region of interest, and deform the circular shape to obtain an oval of approximately similar dimensions as the region of interest.

The foregoing objects and advantages of the present invention may be more readily
30 understood by one skilled in the art with reference being had to the following detailed description of preferred embodiments thereof, taken in conjunction with the accompanying drawings in which:

FIG. 1 is a flowchart illustrating the steps performed by the method for utilizing user input for border detection in diagnostic imaging in accordance with the present invention; and

FIG. 2 is a block illustration of a system for border detection in diagnostic imaging
5 in accordance with the present invention.

Several embodiments of the present invention are hereby disclosed in the accompanying description in conjunction with the figures. Preferred embodiments of the present invention will now be described in detail with reference to the figures wherein like reference numerals identify similar or identical elements.

10 An embodiment of the present invention, shown in FIG. 1, provides a method for defining internal structural borders in a medical ultrasound image. In step 101, an ultrasound imaging system images a patient or other object appropriately capable of being imaged by ultrasound energy. The ultrasound imaging system transfers the ultrasound image(s) or volume data to an electronic data storage device, e.g. volatile and non-volatile
15 memory, magnetic media, optical media, etc. in step 102. The image data is also displayed on a display screen having an interface configured for providing an operator controllable image processing and analysis functionality in step 103.

In step 104, an operator selects one or more region(s) of interest (RoI) on the displayed image data as the desired starting point (seed). The interface allows the operator
20 to indicate the RoI (either in 2D or 3D) by selecting one or more shapes from amongst a variety of simple geometric models, e.g. circle, square, polygon, slice, cube, sphere, etc., and placing the selected model on the image so that the model bounds the RoI. Additionally the interface provides a method for the operator to indicate the ultrasound image type, for example, cardiac, fetal, etc.

25 The image type and bounded RoI are used by the system for analyzing the area within the region(s) of interest in step 105. Contours and structures within the RoI are detected in step 106. A method for delineating these contours and structures includes adjusting contrast and colorizing structures according to predefined or operator-definable preferences, and display of the resulting image data on the display screen are provided in
30 step 108. The delineation preferences to be applied to the RoI of the ultrasound image are set in step 107 prior to execution of step 108.

In step 109, the operator is given the opportunity to review and either accept the image processing as displayed in step 108 or reject it if the RoI is not acceptably displayed. If the results of step 108 are acceptable, the process is completed. However, if the operator rejects the results of step 108, step 104 is executed again, giving the operator an
5 opportunity to adjust the RoI selection as well as the image type in an attempt to refine the resulting image data in step 108. The subsequent steps are executed as described above.

Additional features may be incorporated into the present embodiment of the invention, for example, the method may include a process by which the system can learn and adapt over time based on the feedback received from the operator in step 109. Further,
10 image processing and manipulation functions may also be provided by the system, such as enlarging, rotating, and cropping the RoI.

The analysis and detection steps are performed by the present embodiment through analytical algorithms, which use predetermined and internally located complex shapes approximating the general shapes of various bodily tissues and structures. The indicated
15 image type is used to identify which of the variety of complex shapes are to be applied to the RoI analysis. However, as discussed previously the imaged shape of a bodily tissue or structure may appear different from the typically associated shape of the tissues and structure due to various factors such as the angle and position of the ultrasound imaging unit. For this reason, the present embodiment utilizes a fuzzy model of these tissues and
20 structures. In this case fuzzy is meant to indicate that the complex shapes have, as their boundaries, a predefined acceptable range (e.g., maximal size limit) instead of a sharply defined boundary, thus a tissue boundary point need not lie directly on the boundary of the corresponding complex shape but merely within the acceptable range. Additionally, as more of the tissue boundary points are detected on the image, the acceptable range of the
25 boundary of the complex shape may be adjusted as appropriate, "on the fly" or in real-time, based on the location of the detected points. These detections and adjustments are performed automatically by the present embodiment.

An alternate embodiment of the present invention allows the operator to adjust a shape selected from the variety of simple geometric models following the execution of step
30 104. Thus, the shape used to indicate the RoI can more closely match the actual shape of the region and, consequently, increase the accuracy and speed of the analyzing and detection steps. Additionally, if in step 109, the results from step 108 are rejected, then the

originally selected shape of step 104 can be modified to increase the likelihood of a successful end result from step 108.

The method as described above may be implemented as a software application or set of processor commands and installable onto a pre-existing ultrasound diagnostic system. In this embodiment, the software application may be stored on any of variety of
5 commonly used computer readable media, such as compact disc, DVD, and magnetic media, or as a network downloadable software package.

Another embodiment, as shown in FIG. 2, provides an ultrasound diagnostic system
200 configured and disposed for executing the steps of the present invention as described
10 above. The system 200 includes a controller/processor unit 201, having a user input device(s) 202, such as keyboard, mouse, speech recognition device, etc., a storage device 203, and a display screen 204, connected with and configured for controlling an ultrasound imaging device 206, such as an ultrasonic probe. An optional, hard copy output device 205,
such as a printer, may also be present and connected to the controller/processor unit 201.

15 A software application or set of processor commands, residing within the controller/processor unit 201 or stored on the storage device 203, is configured to execute the steps of the method of the present invention as shown in FIG. 1 and described above. The controller/processor unit 201, upon receiving an actuation signal from the operator via the user input device(s) 202, activates the ultrasound imaging device 206. The actuation
20 signal may include or be preceded by a set of operator-adjustable preference signals which are used by the controller/processor unit 201 to adjust the parameters of the ultrasound imaging device 206. The ultrasound imaging device 206 transmits high frequency audio signals toward a patient or object (not shown) to be imaged and receives signals reflected from structures internal to the scanned patient or object in a manner well known in the art.
25 The received signals are transferred to the controller/processor unit 201 for further processing.

The controller/processor unit 201 processes signals and displays a corresponding image 208 on the display screen 204. Additionally, the controller/processor unit 201 provides an interface, preferably a graphical user interface (GUI) 207, which allows the
30 operator to selectively indicate a region of interest (RoI) on the displayed image 208. The interface may consist of any of a combination of interface elements, such as menus 209, buttons 210 and icons (not shown) configured to provide predetermined functions. The

operator selects the RoI by selecting one or more shape(s) from a variety of simple geometric shapes— square, slice, circle, cube, sphere, etc. — provided by the interface 207 and positioning the shape(s), orientation and size over the RoI such that the RoI is bounded approximately to the boundaries of the shape(s). Further, the operator indicates the type of
5 ultrasound image being displayed through manipulation of interface elements 209, 210, etc. Based on these few inputs from the operator, the controller/processor unit 201 applies predefined algorithms to the RoI for enhancing the various structures contained within the RoI.

10 The described embodiments of the present invention are intended to be illustrative rather than restrictive, and are not intended to represent every embodiment of the present invention. Various modifications and variations can be made without departing from the spirit or scope of the invention as set forth in the following claims both literally and in equivalents recognized in law.

CLAIMS:

1. A method of defining internal structural borders in a medical ultrasonic image comprising the steps of:
 - placing at least one geometric shape in a proximal relationship to a feature in the ultrasonic image;
 - locating at least one starting point within the at least one geometric shape; and
 - detecting a tissue border and/or structure within a portion of the ultrasonic image bordered by the at least one shape, the detection is performed using one or more shapes selected from a set of predetermined shapes, each having generally the shape of a bodily tissue or structure and a fuzzy border region.
2. The method of claim 1 further comprising the step of displaying the ultrasonic image with delineations, the delineations identifying the detected tissue border and/or structure.
3. The method of claim 1, wherein the placing step further includes adjusting at least one parameter from a set of parameters of the at least one selected geometric shape to approximate the shape of the feature.
4. The method of claim 3, wherein the set of parameters includes size, position and orientation.
5. An ultrasound imaging system configured and disposed for defining internal structural borders in a medical ultrasonic image comprising:
 - an ultrasound transducer probe configured for producing ultrasound signals, directing the ultrasound signals towards a target to be imaged, and detecting the ultrasound signals reflected from the target;
 - a display screen for displaying the reflected ultrasound signals in an operator-viewable format;
 - means for enabling an operator to indicate a region of interest (RoI) by placing at least one geometric shape in a proximal relationship to the RoI; and
 - a processor comprising:
 - means for locating at least one starting point within the at least one shape; and
 - means for detecting a tissue border and/or structure within a portion of the ultrasonic image bordered by the at least one shape by using one or more shapes selected

from a set of predetermined shapes, each having generally the shape of a bodily tissue or structure and a fuzzy border region.

6. The system of claim 5, wherein the display screen displays the ultrasound image with a plurality of delineations, the delineations identifying the tissue border and/or structure on the display screen.

7. The system of claim 5, further comprising means for adjusting at least one parameter from a set of parameters of the at least one selected geometric shape to approximate the shape of the feature.

8. The system of claim 6, wherein the set of parameters includes size, position and orientation.

9. A computer readable medium comprising a set of computer readable instructions capable of being executed by at least one processor for defining internal structural borders in a medical ultrasonic image comprising the steps of:

placing at least one geometric shape in a proximal relationship to a feature in the ultrasonic image;

locating at least one starting point within the at least one geometric shape; and


detecting a tissue border and/or structure within a portion of the ultrasonic image bordered by the at least one shape using one or more shapes selected from a set of predetermined shapes, each having generally the shape of a bodily tissue or structure and a fuzzy border region.

ABSTRACT

A method for utilizing user input for segmentation and feature detection in diagnostic ultrasound imaging is provided. The method provides border detection from a limited number of operator interactions, thus allowing the border detection to be performed rapidly; a feature, which allows the border detection method to be applied to real-time video imaging with little or no delay. The border detection method may be incorporated within a diagnostic ultrasound imaging system or as a user-installable software application capable of being installed on and executed by an ultrasound imaging system.

5

FIG. 1

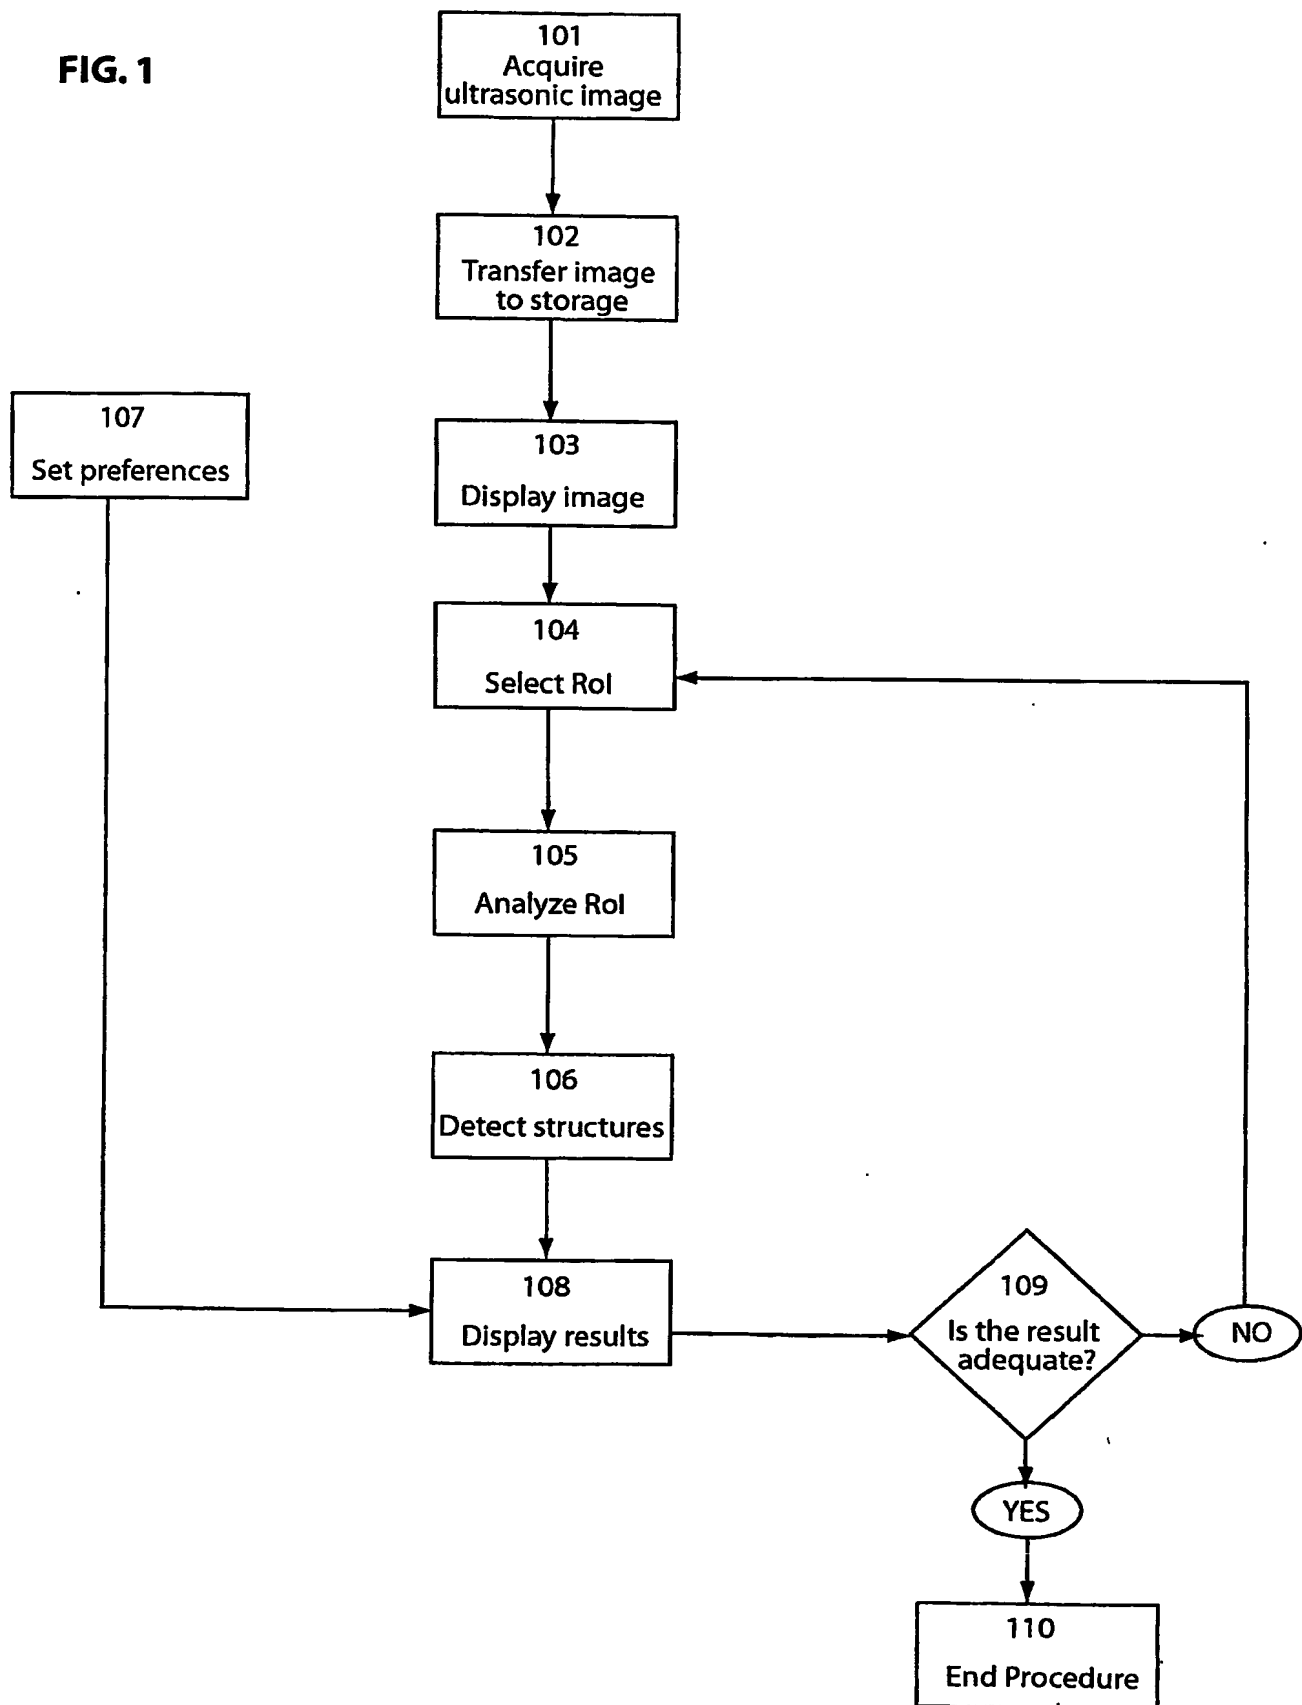

200

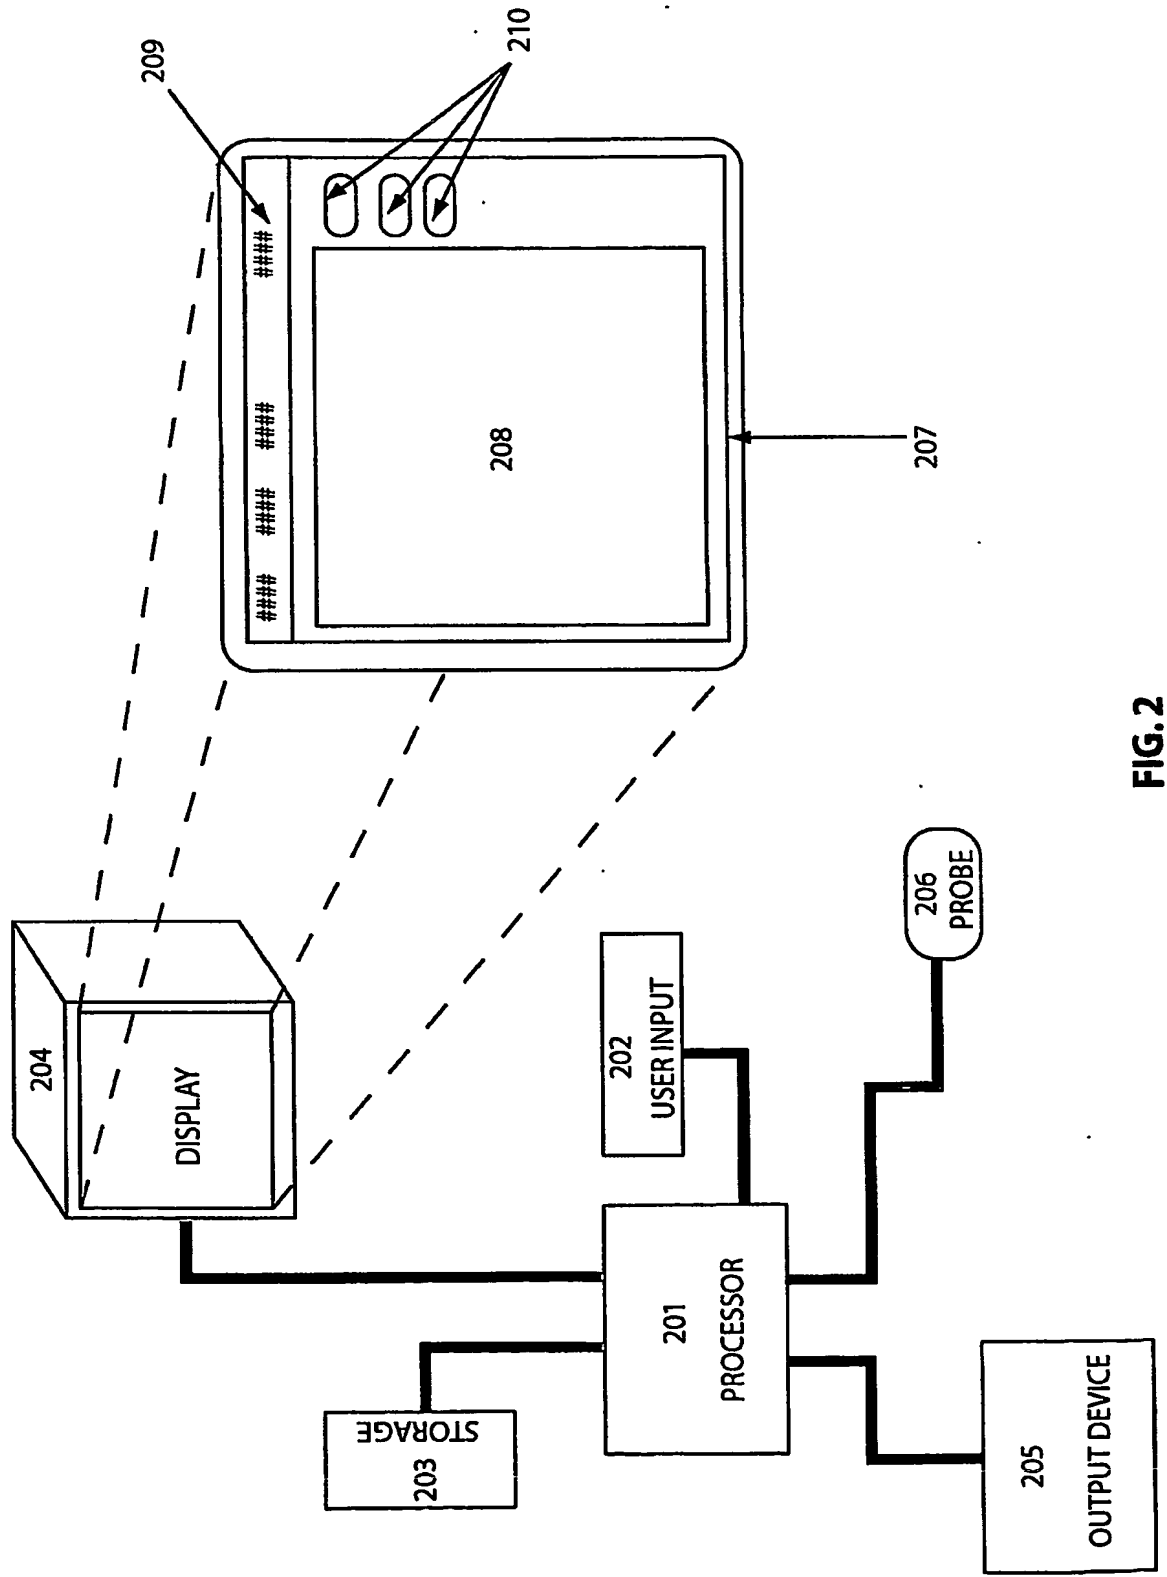


FIG. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.